

Machine guard door

The double hinged door can be built from our mesh, polycarbonate or steel panels to fit your chosen machine guard system. Use the standard panel heights 2050 mm or 1250 mm in up to 6 widths, or combine the panels to get your requested size. The double hinged doors is supplied as separate posts, panels and door kit for assembly on site.

Depending on the risk assesement, you choose the preferable lock for your door; Magnetic Lock, Cylinder Lock or the Troax Safe Lock, built to fit many safety switches.

Troax machine guard systems are so flexible you can at any time choose to convert any panel to a door, just by adding our door kit.




FACTS

Door dimensions, system height 1400 mm

| Panel Height (mm) | Width (mm) |
|-------------------|------------|
| 1250 | 700 |
| 1250 | 800 |
| 1250 | 1000 |
| 1250 | 1200 |
| 1250 | 1500 |

Door dimensions, system height 2200 mm

| Panel Height (mm) | Width (mm) |
|-------------------|------------|
| 2050 | 500 |
| 2050 | 700 |
| 2050 | 800 |
| 2050 | 1000 |
| 2050 | 1200 |
| 2050 | 1500 |

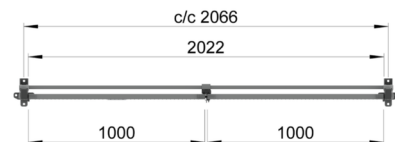

Standard colour for posts are grey RAL7037, black RAL9005 or yellow RAL1018. Standard colour for mesh panels are RAL 7037 and RAL 9005.
Doors can be made in the colour of your choice.

LOCK OPTIONS

Magnetic Lock (Kit 6400)



Cylinder Lock (Kit 5730)



Safe Lock and Safe Lock ES (Kit 5030)

