


Machine guard door

The double sliding door can be built from our mesh, polycarbonate or steel panels to fit your chosen machine guard system. Use the standard panel heights 2050 mm or 1250 mm in up to 6 widths, or combine the panels to get your requested size. The sliding doors can be ordered partly pre-assembled with the guide rails mounted. The panels and posts together with the top rail and door kit are supplied separate for assembly on site.

Depending on the risk assessment, you choose the preferable lock for your door; Magnetic Lock, Cylinder Lock or the Troax Safe Lock built to fit many safety switches.

Maximum opening width as standard option is approximately 3000 mm.

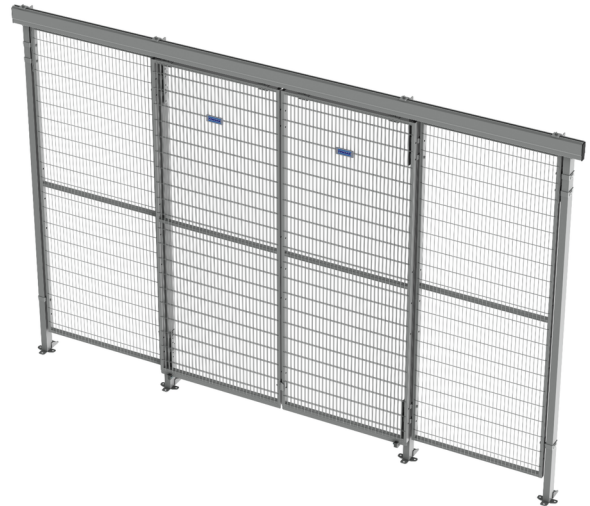

FACTS


Door dimensions, system height 1400 mm

Panel Height (mm)	Width (mm)
1250	700
1250	800
1250	1000
1250	1200
1250	1500

Door dimensions, system height 2200 mm

Panel Height (mm)	Width (mm)
2050	500
2050	700
2050	800
2050	1000
2050	1200
2050	1500

Standard colour for posts are grey RAL7037, black RAL9005 or yellow RAL1018. Standard colour for mesh panels are RAL 7037 and RAL 9005
Doors can be made in the colour of your choice.

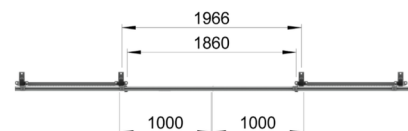

LOCK OPTIONS

Magnetic Lock (Kit 6420)



Cylinder Lock (Kit 5780)



Safe Lock and Safe Lock ES (Kit 5030)

