


Machine guard door

The double telescopic door can be built with our mesh or polycarbonate panels to fit your chosen machine guard system. Two telescopic rails located at the top and the bottom of each door blade increases the stability and creates an opening with a free access in height. Use the standard panel heights 2050 mm or 1250 mm in the various widths up to 1500 mm. The doors can be ordered partly pre-assembled from factory, or as separate panels, posts and door kit for assembly on site.

With the double telescopic sliding door you can build a door opening from 1600-3000 mm.

Depending on the risk assessment, you choose the preferable lock for your door.

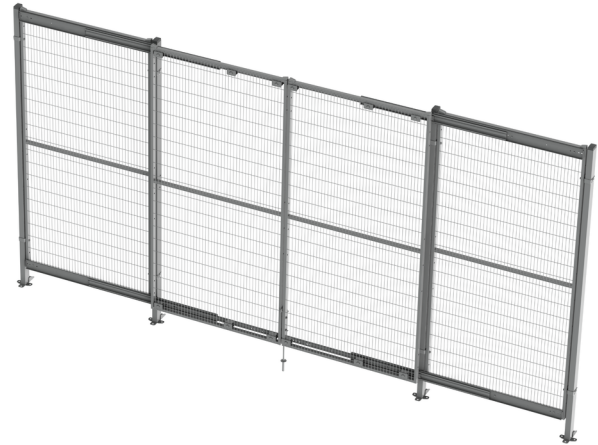

FACTS

Door dimensions, system height 1400 mm


| Panel height (mm) | Panel width (mm) | Opening width (mm) |
|-------------------|------------------|--------------------|
| 1250 | 800 x2 | 1553 |
| 1250 | 1000 x2 | 1953 |
| 1250 | 1200 x2 | 2353 |
| 1250 | 1500 x2 | 2953 |

Door dimensions, system height 2200 mm

| Panel height (mm) | Panel width (mm) | Opening width (mm) |
|-------------------|------------------|--------------------|
| 2050 | 800 x2 | 1553 |
| 2050 | 1000 x2 | 1953 |
| 2050 | 1200 x2 | 2353 |
| 2050 | 1500 x2 | 2953 |

Standard colour for posts are grey RAL7037, black RAL9005 or yellow RAL1018. Standard colour for mesh panels are RAL 7037 and RAL 9005.

Doors can be made in the colour of your choice.

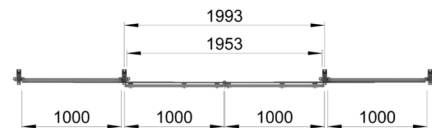

LOCK OPTIONS

Cylinder Lock (Kit 5780)



Safe Lock (Kit 5030)



Safe Lock ES (Kit 5040)

